


# LED Batten Light with Sensor

16W / 24W

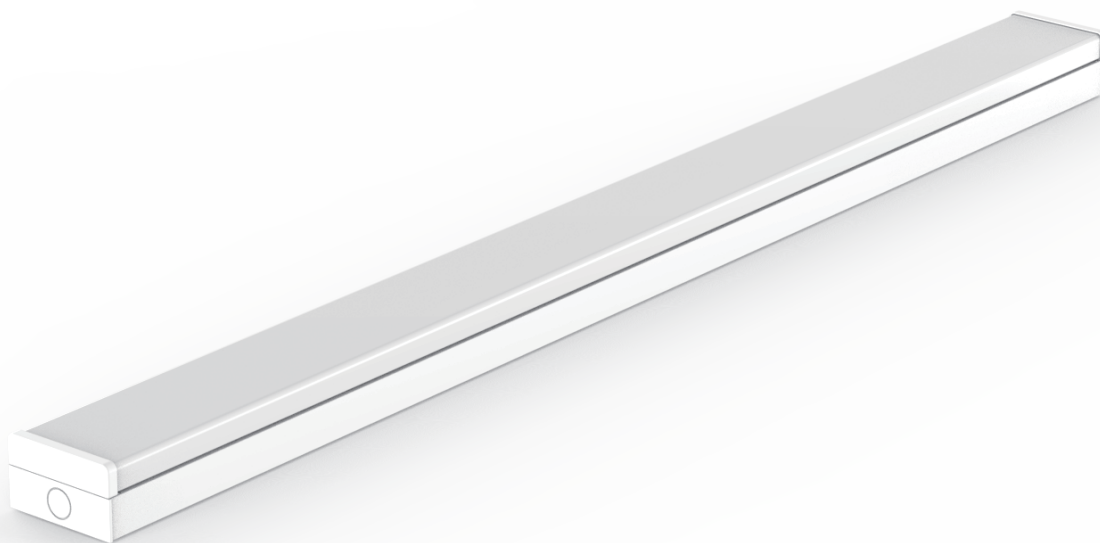

With remote control  
Motion+daylight sensor  
Detection area:3-5mertres  
Hold on time:10s/1min/5min/30min

## Certificates



LM-80 TM-21 LM-79  
ISTMT LCP



Victorian  
Energy  
Upgrades

## Application scenarios

Indoor lighting, with ip 20, can be used in supermarkets, homes and other occasions. Shopping malls, corridors, parking lots, factories, warehouses, schools, hospitals, public buildings, subway stations, railway stations, airport terminals, etc.



## Technical parameter


| Item             | ECO-BT16W-1200-D                 | ECO-BT24W-1200-D |
|------------------|----------------------------------|------------------|
| Size(mm)         | 1170*83*73                       |                  |
| Power            | 16W                              | 24W              |
| Voltage          | AC220~240V,50Hz                  |                  |
| Lumen Efficiency | 140lm/W                          |                  |
| Lumen (±10%)     | 2240lm                           | 3360lm           |
| Sensor           | Daylight&Microwave Motion Sensor |                  |
| Dimmable         | PWM                              |                  |
| Driver Brand     | ULA1L                            |                  |
| LED Type         | SMD 2835                         |                  |
| CCT              | 3000k & 4000k & 5700k            |                  |
| Beam Angle       | 120°                             |                  |
| PF               | >0.90                            |                  |
| CRI              | Ra>80                            |                  |
| IP Rank          | IP20                             |                  |
| Warranty         | PC+SPCC                          |                  |
| Material         | 3 years                          |                  |
| Working Temp     | -20~50 C                         |                  |

## LED Manual instruction







### Safety Notice:

- ❶ Installation should be done by registered electricians.
- ❷ Before replacing the driver, please switch off the power supply and wait until it cools down completely.
- ❸ Never touch the working luminaire
- ❹ In any case of malfunction, switch off the power supply immediately, and do not try to repair it yourself.
- ❺ Repairment should only be done by registered electricians or official service agent.



### WARNING

Switch off the power supply  
before installation

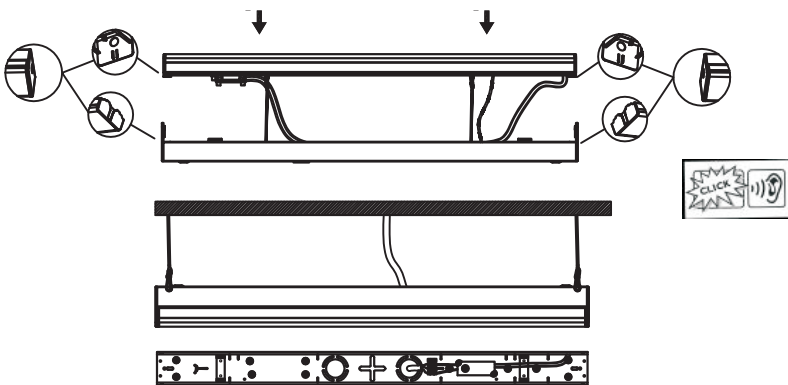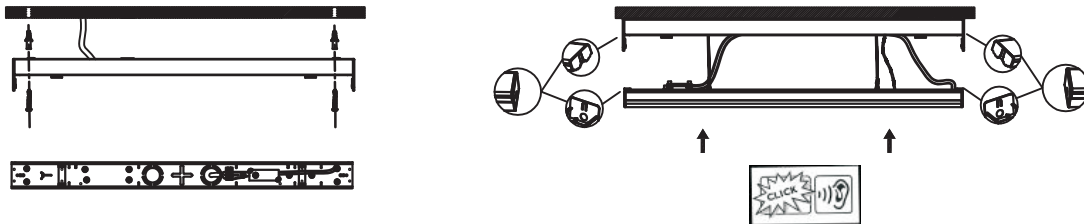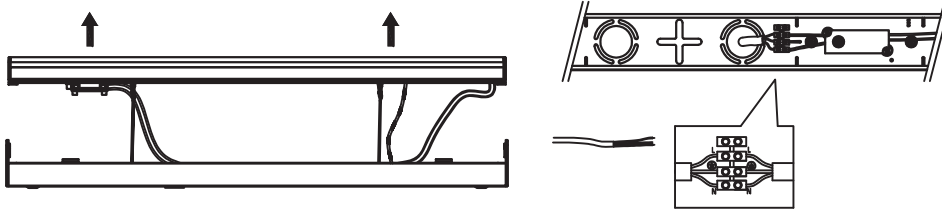


### WARNING

Switch off the power supply  
before installation

## Remote Control Instructions

### SPECIALLY FOR HD021VCR

Model HD18R

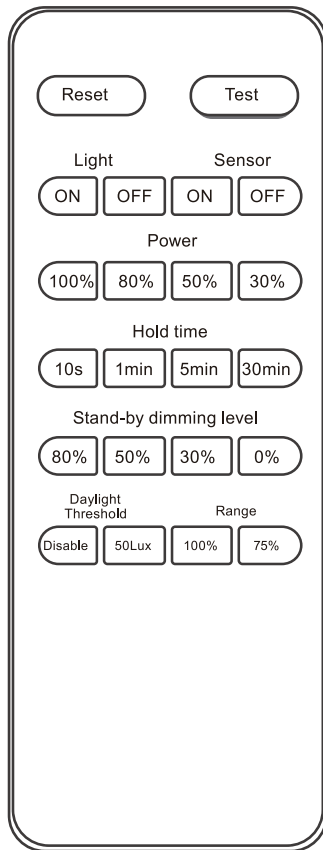

- Reset**

Reset Button  
Press the button, the program will be : 100% detection area, 100% power, Holdtime 1MIN, no standby period, daylight disable
- Test**

Test Button  
Press the button, the program will be : 100% detection area, 100% power, Holdtime 2S, no standby period, daylight disable
- ON OFF**

Light  
Turn ON and OFF the light; Keep light ON for 2S then turn OFF when it's powered again.
- ON OFF**

Sensor  
Motion sensor function ON or OFF; If OFF, the sensor doesn't detect motion.
- 100% 80% 50% 30%**

Power  
Dimming Output Options, dim the light to a specific level
- 10s 1min 5min 30min**

Hold time  
Holdtime Options in sensor mode
- 80% 50% 30% 0%**

Stand-by dimming level  
Standby dimming level options in sensor mode, with default standby period as  $+\infty$  infinite; No standby function if preset as 0%.
- Disable 50Lux**

Daylight Threshold  
Daylight threshold options in sensor mode
- 100% 75%**

Range  
Detection area options in sensor mode, 100% as strongest sensitivity.

## Detail



## Packing information

| N.W(KG) | G.W(KG) | MASTER CARTON(mm) | QTN/CTN |
|---------|---------|-------------------|---------|
| 15.69   | 16.89   | 1215*240*280      | 9       |