

# TEST REPORT

Prepared For

## Shenzhen Ulledlighting Photoelectricity Co., Ltd.

A1702, Yonghuayuan Business Building, No. 6 Baotian 2nd Road, Baoan District, Shenzhen,  
China

#**Model:UL-H100W-HS**

<b>Report Type:</b>	Report is prepared for the client above to present the result of measured temperature of samples and projected lumen maintenance life of LED lighting product according to projecting method from IES: IES TM-21-11
<b>Test Engineer:</b>	Hexy He <i>Hexy He</i>
<b>Report Number:</b>	R2DG200115801-10-1-M3
<b>Test Date:</b>	2020-02-13
<b>Report Date:</b>	2020-11-04
<b>Reviewed By:</b>	Blake Zhang / EE Engineer
<b>Revised Note:</b>	The previous report R2DG200115801-10-1-M2 is replaced by this report on 2020-11-04
<b>Prepared By:</b>	Bay Area Compliance Laboratories Corp. (Dongguan). No.69,Pulongcun ,Puxinhu Industrial Area, Tangxia , Dongguan, Guangdong, China. Tel: +86-0769-86858888 Fax:+86-0769-86858588

## 1. drGeneral Description

### Information of Final Products:

One test sample was in good condition and received on 2020-01-15, and used for testing.

#Model Number:	UL-H100W-HS
#Model Name:	LED High Bay Light
#Brand Name:	ULLEDLIGHTING
#Manufacturer:	Shenzhen Ulledlighting Photoelectricity Co., Ltd.
#Rated Voltage:	AC100V-240V ,50/60HZ
#Test Voltage:	240V,50Hz
#Rated Power:	100W
#Nominal CCT:	5000K
#Series-Parallel:	12P,40S
#Number of LED chips:	480
Average drive current:	71.5mA
Total drive current:	858mA
#Driver Brand:	ULLEDLIGHTING
#Driver Model:	GD122D951-VF21

Remark: There are 480pcs LED chip(s) in models UL-H100W-HS, that we measurement the total current of driver output was 858mA. Because in each series that the forward current on each led chip(s) was equivalent ,so forward current on each led chip(s) was 71.5mA ( $858\text{mA}/12=71.5\text{mA}$ ).

### #Information of LED Light Source:

Model Number of LED Light Source:	RF-50RI32DS-BF-01-J-Y
Type of LED Components:	LED Package
Manufacturer:	Shenzhen Refond Optoelectronic Co., Ltd.
LM-80 Report No:	R2DG151225056-10-9000

## 2. Standards Used

- IES TM-21-11 Projecting Long Term Lumen Maintenance of LED Light Sources
- ANSI/UL 1598-2008: Standard for Safety of Luminaires
- Annex A of IES LM-84-14 Recommendations for measurement of IN-SITU conditions LED case temperature

## 3. Test Method

Lumen maintenance life of LED light source and LED lamp or luminaire (if any) is the elapsed operating time over which an LED light source maintains a given percentage of its initial light output.  $L_{70}$  in this report is the time (in hours) when the light output from the LED has dropped to 70% of its initial output.

The LED light source is LED package, array, or module which is tested in IES LM-80-08 test report. Final product means LED lamp or luminaire which the LED light source will be included.  $TMP_{LED}$  is the temperature of the thermocouple attachment point on the LED light source package as defined by the manufacturer of the LED light source. The *in situ* temperature of LED light source used in final product was used to calculate the lumen maintenance life of final product, if any.

The *in situ* temperature is measured according to ANSI/UL 1598 and IES LM-84 Annex A. The LED which has the highest temperature was measured at the location of LED case which is specified by LED source manufacturer and detailed by LM-80 report. The hottest LED was found by the following procedure:

An IR thermography may be used to find the hottest LEDs. Or if the layout of PCB is symmetrical, the hottest LED should be at the center or close to the center of the array. Or in question, more than one TMP should be measured to find out the hottest LED. The case temperature of the hottest LED source at *in situ* condition is reported and is used to project L<sub>70</sub> life time.

The reported temperature value for each point should be the readings of the hybrid recorder after the temperature of each point is stabilized and constant. A temperature is considered constant if the test has been running for at least 3 hours; and three successive readings, taken at 15-minute intervals, are within 1 degree C of one another and are not rising. Or the test was run for a minimum of 7.5 h. Ambient temperature variations above or below 25 °C have been respectively subtracted from or added to temperatures recorded at points on the device.

The drive current of LED package/module/ array was calculated as the total output current of the driver measured by multimeter, divided by the number of branches in parallel of LEDs.

The calculation of the L<sub>70</sub> life is according to IES TM-21-11.


#### 4. Test Equipment

Device	Manufacture	Model No	Serial No	Calibration date	Calibration due date
Multimeter	FLUKE	17B	1573 1328	2019-07-12	2020-07-11
Hybrid Recorder	YOKOGAWA	DR240	10#	2019-03-10	2020-03-09
AC POWER SUPPLY	HengPu	HPA 1103	0003394	2019-03-08	2020-03-07
Thermography	FLIR	E60	49037877	N/A	N/A



Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attested that all calibration has been performed using suitable standards traceable to National Primary Standards and International System of Units (SI).

#### 5. In situ Temperature and Driver Current Measurements of Final Product

IR thermograph from hot PCBAs of Sample

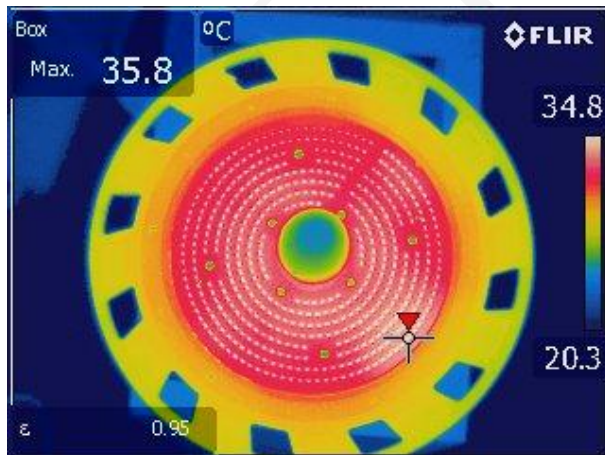

Temperature measurement point on TMP<sub>LED</sub>

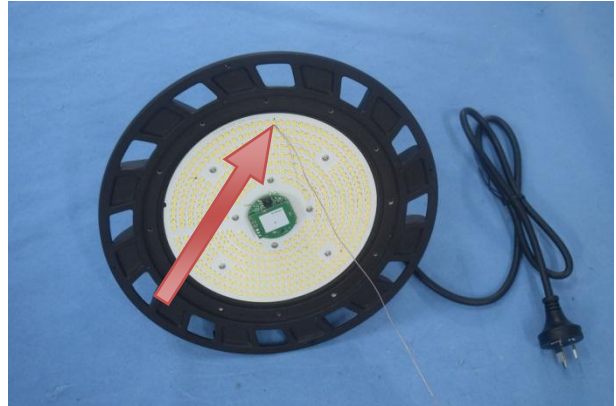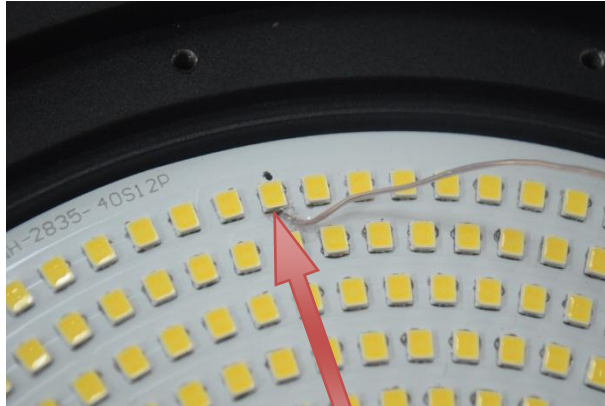

Temperature Measurement Data

#### Test Condition

Ambient Temperature: 25°C±5°C  
Relative Humidity: 54 %  
Supply voltage: 240V 50Hz  
Type of thermocouples: T  
Test Duration: ≥3.5Hours

#### Test Result

TMP<sub>LED</sub>: 69.6 °C  
Forward Current(I<sub>F</sub>): 71.5 mA


## 6. Lumen Maintenance Data of LED Light Source from LM-80 Report

Test Data for 55°C Case Temperature		Test Data for 85°C Case Temperature		Test Data for 105°C Case Temperature	
Time (hours)	Lumen Maintenance (%)	Time (hours)	Lumen Maintenance (%)	Time (hours)	Lumen Maintenance (%)
1000	99.81	1000	99.66	1000	99.63
2000	99.33	2000	99.08	2000	99.18
3000	98.87	3000	98.51	3000	98.47
4000	98.05	4000	97.55	4000	97.20
5000	97.60	5000	96.90	5000	96.49
6000	97.14	6000	96.34	6000	95.77
7000	96.82	7000	95.90	7000	95.29
8000	96.55	8000	95.52	8000	94.80
9000	96.27	9000	95.11	9000	94.30

## 7. Calculate Result of Life Time Projection

Temperature Interpolation at 69.6° C (projection based on in-situ temperature entered)	
$T_{s,1}$ (°C)	55.00
$T_{s,1}$ (K)	328.15
$\alpha_1$	3.639E-06
$B_1$	0.994
$T_{s,2}$ (°C)	85.00
$T_{s,2}$ (K)	358.15
$\alpha_2$	4.979E-06
$B_2$	0.994
$E_a/k_b$	1.23E+03
$A$	1.538E-04
$B_0$	0.994
$T_{s,i}$ (°C)	69.60
$T_{s,i}$ (K)	342.75
$\alpha_i$	4.268E-06
<b>Reported <math>L_{70}(9k)</math> at 69.6°C (hours)</b>	<b>&gt;54000</b>

## 8. Final Product Photo

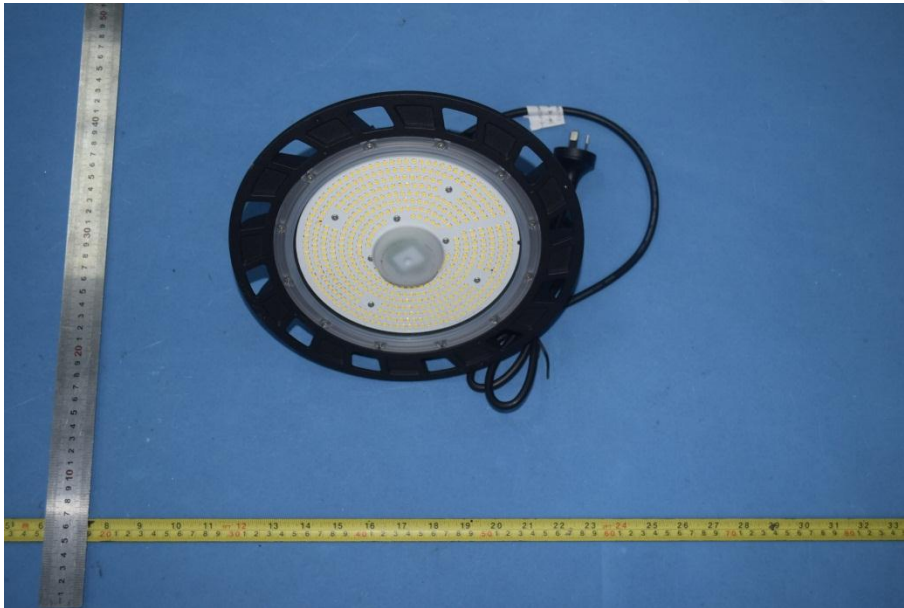







**ULLEDLIGHTING**

## **LED High Bay Light**

**Model:** UL-H100W-HS

**Input Voltage:** AC100~240V 50/60Hz

**Driver Output:** DC120V

**Power Factor:** >0.9

**CCT:** 5000K Cool White

**Sensor:** Motion+Daylight+Dimmable

**CRI:** Ra>70 120°

**IP65**



**Made in China**



## 9. Report Revision

Report Number	Report Date	Contents
R2DG200115801-10-1	2020-04-22	Original report.
R2DG200115801-10-1-M1	2020-07-16	Update the description of Remark
R2DG200115801-10-1-M2	2020-09-17	Update the product label and add the remote control photo.
R2DG200115801-10-1-M3	2020-11-04	Add the Nominal CCT in this report.

## Directions

1. The information marked “superscript #” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report.
2. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
3. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
4. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.
5. This report cannot be reproduced except in full, without prior written approval of the Company.
6. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

\*\*\*\*\*END OF REPORT\*\*\*\*\*